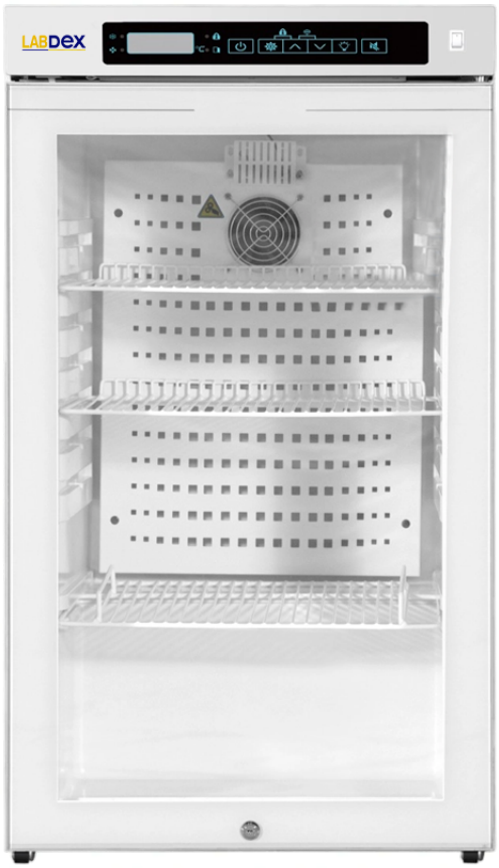

Pharmacy Refrigerator LX3030PR

Email: info@labdex.com **website:** www.labdex.com

Description

Pharmacy Refrigerator LX3030PR is constructed with durable SPCC sprayed steel on the exterior, this unit features a high-precision control system with a temperature 2 - 8°C and a suction fan to ensure uniform temperature distribution. It includes lockable glass doors with keys, an integrated high-accuracy temperature probe, and interior LED lighting for clear visibility. The real forced air circulation combined with an efficient refrigeration system rapidly lowers the chamber temperature while maintaining excellent temperature stability and minimal fluctuations.

Specifications

Capacity	100 L
Shelf/drawer	Shelves/3
Cooling method	Forced Air Cooling
Defrost	Auto
Refrigerant	R600a
Noise	50 (dB)
Ambient temperature	10 - 32°C
Temperature range	2 - 8°C
Temperature control accuracy	0.1°C
Sensor type	NTC
Temperature controller	Microprocessor
Display	Digital display
Interior material	HIPS
External material	SPCC Sprayed Steel
Door type	Glass door
Lighting	LED
Access port	1 with 25 mm diameter
Alarm	Audible and visual alarms

ECO function	CFC free refrigerant and energy saving
Power failure backup	8 hours
Power consumption	0.53 kWh / 24 h
Power	80 W
Current	0.8 A
Voltage / Frequency	220 V 50 Hz / 110 V 60 Hz
Internal dimension (W x D x H)	385 x 356 x 737 mm
External dimension (W x D x H)	505 x 510 x 875 mm
Packing dimension (W x D x H)	580 x 560 x 930 mm
Net weight	35 Kg
Gross weight	50 Kg

Features

- Constructed with high-quality, antibacterial, and corrosion-resistant steel exterior
- Design with durable HIPS (High Impact Polystyrene) interior
- Forced air cooling system with suction fan for uniform temperature circulation
- Double-layer Low E glass door with standard lock and keys
- It has microprocessor control function with digital display
- Includes 3 height-adjustable shelves
- Equipped with a single compressor and access port
- Highly precise temperature sensor probe
- Offers energy-saving ECO function with CFC-free refrigerant
- 8 Hours power failure backup
- It has multiple alarms for high/low temperature, power failure, door ajar, and thermostat malfunction

Applications

- It is ideal for hospitals, pharmacies, and labs to safely store and preserve temperature-sensitive items such as vaccines, drugs, enzymes, hormones, stem cells, RNA extracts and gene libraries.

71-75 Shelton Street Covent Garden, London WC2H 9JQ UK.
Email: info@labdex.com | Website: www.labdex.com